OXMIX 4.5 Self Loading Concrete Mixer (Cummins Engine)

Date: December 29, 2025

CATALOGUE

Part I: Technical Parameters.....2

Part II: Features.....4

Part III: Optional configuration device.....5

Part IV: More Photos.....6



www.junowhn.com

EL SALVADOR: AVE, ESPAÑA BO, SAN MIGUELITO, N 1430, SAN SALVADOR, SAN SALVADOR . NIT 0614-290422-103-2 No. REGISTRO 314500 CEL (503)60436015 CORREO: JUNOW.SV@GMAIL.COM

GUATEMALA-9NA AVE. 1-25,ZONA 5 CHIMALTENANDO CEL (502)374623836 CORREO: VENTAS@JUNOWHN.COM


HONDURAS: RESIDENCIAL MONTELIMAR, BLOQUE 2, No. 99, QUIMISTAN SANTA BARBARA. CEL (504)87426561


JUNOW SA DE CV

JUNOW SA

JUNOW S DE RL

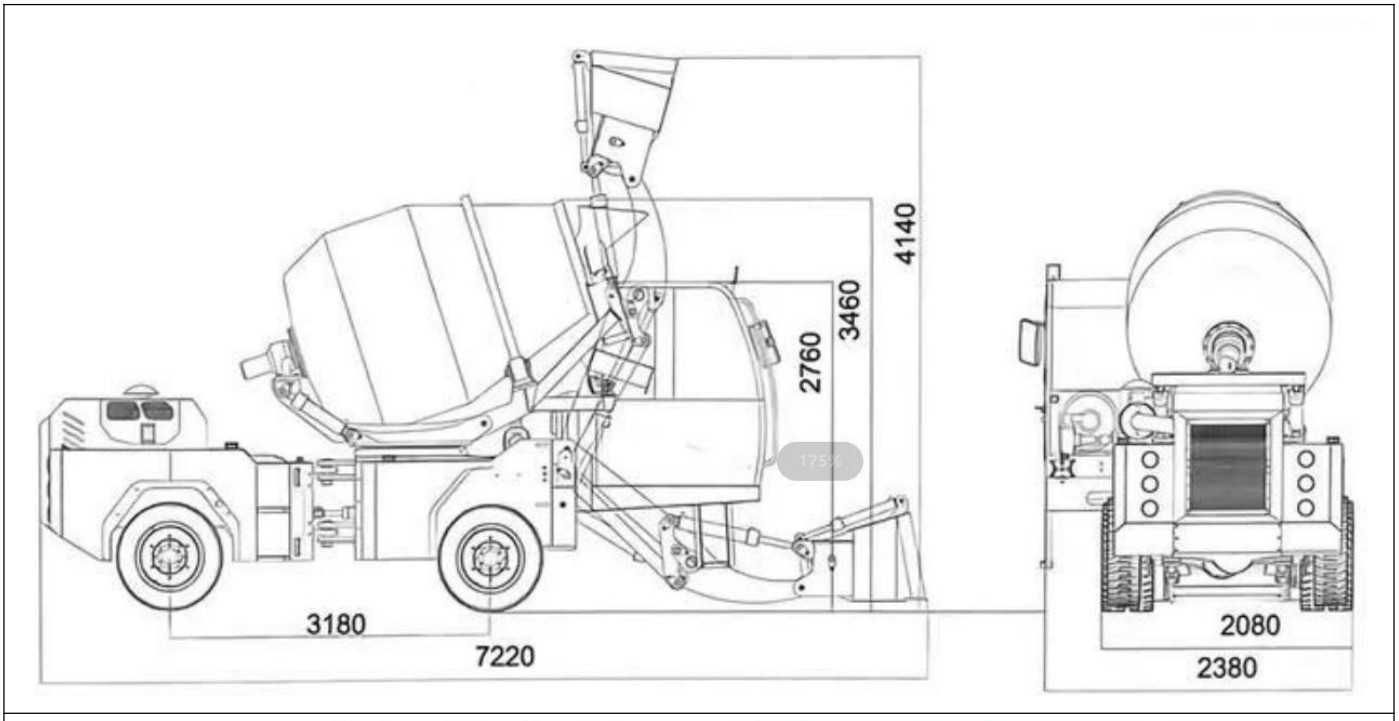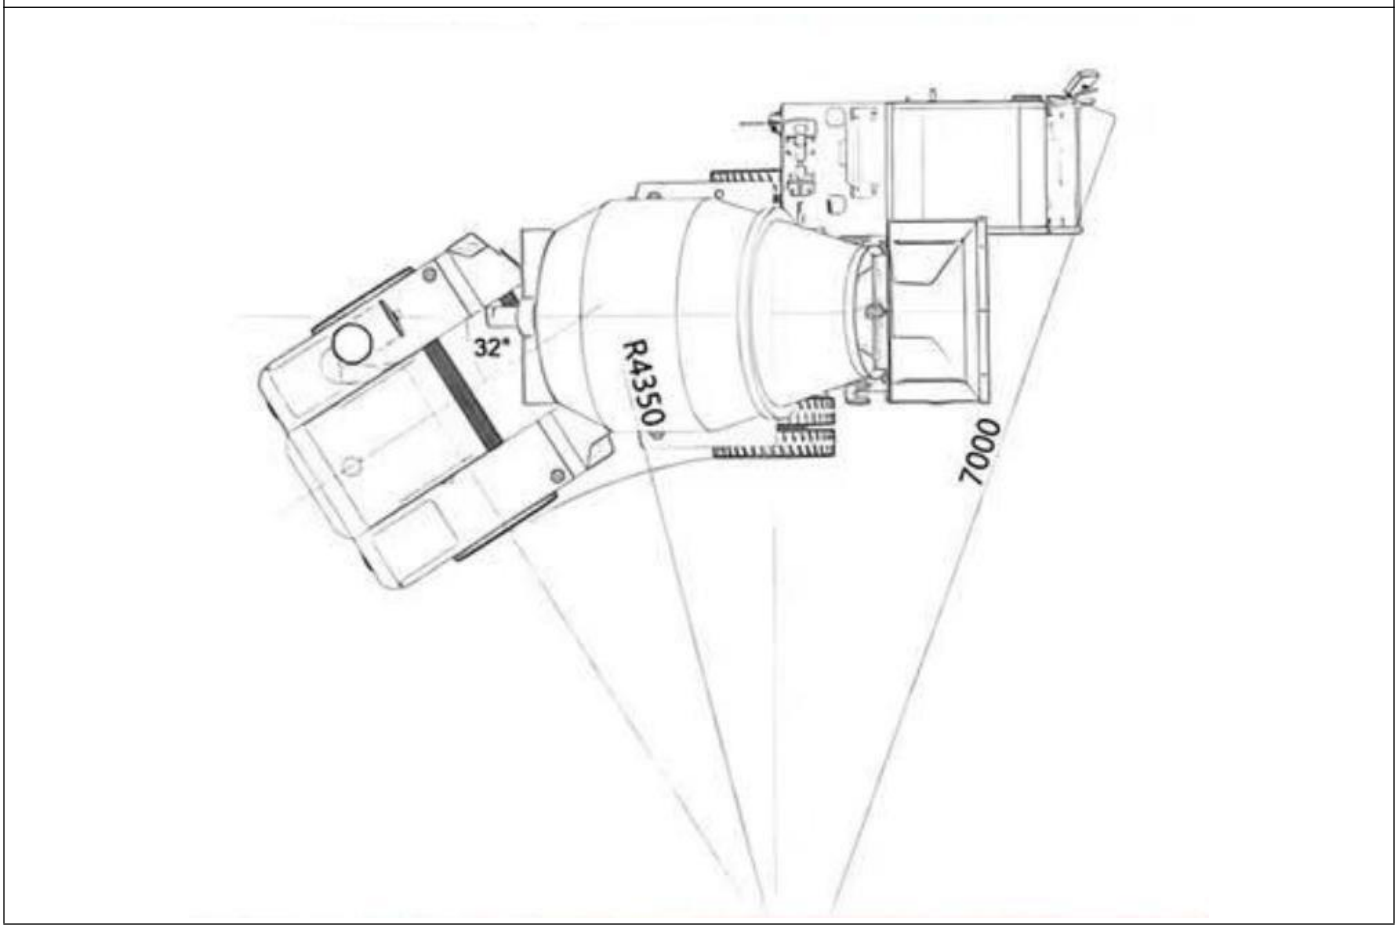Part I: Technical Parameters









Model			SLM4.5
Mixing drum	Input capacity	M3/ batch	7.2
	Output capacity	M3/ batch	4.5
	Productivity	M3/h	16-20
	The ratation speed of drum	R/Min	18-22
Vehicle	Overall Dimension	(L*W*H) mm	7220×2380×3460
	Overall weight	Kg	8500
	Drive		4*4 Four-Wheel Drive
	Steering		2 wheel steering
	Drum system	The drum tank can rotate 270° and unload concrete without dead Angle on three sides	
	Brake	External disc brake and emergency brake	
	Tyres	Construction tyres 18/70-20, 4 wheel in front	
	Axle	Specially-made hub reduction axle on front/rear axles, flange connection gearbox	
	Maximum Gradient	°	30
	Grade ability	%	24
	Minimum turning diameter	mm	5000
	Gear		2 forward + 2 reverse, High and low speed
	Speed	km/h	The first high speed: 0-17km/h, the second: 17-33km/h; The first low speed：0-6km/h, the second: 6-12km/h.
	Gearbox		Model: ZL315, Full hydraulic transmission,
	Concrete slump	mm	70-260
Engine	Model	/	Cummins brand, Model: 4BTA3.9-C125-II
		Cylinder	4 cylinders
	Power	kw/r/min	95 /1800
	Maximum torque	N.m	495
Hydraulic system	Hydraulic pump	Rexroth Brand, Model: A4VTG 90HW	
	Hydraulic motor	BM5-160	
	Reducer	HYTEK	
	Joystick	Four element distributor servo-controlled with multi-function joystick	
	Maximum pressure	20Mpa	

Feeding hopper	L	Capacity: 500L, Times for feeding: 8-9	
Chute		Slewing. Fitted with two pins easily detachable to increase the Discharge height	
Water supply	Water tank capacity	L	612L
	Supply method		Time relay
Tank	L	diesel:165L, hydraulic oil:165L, Engine: 16L	
Cab	Closed cab with tilting front window, humanized seat, flexible supension and height adjustment are provided, surveillance cameras,etc., air conditioner is optional device		

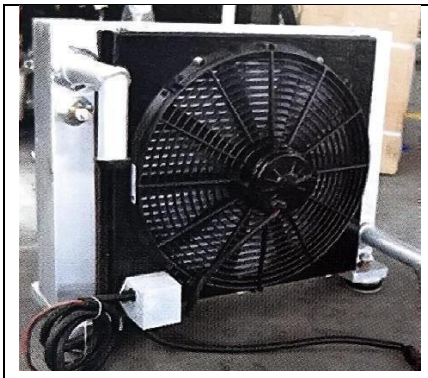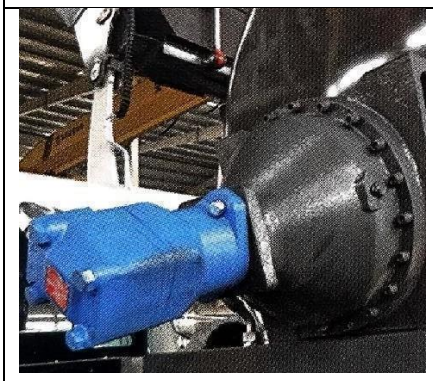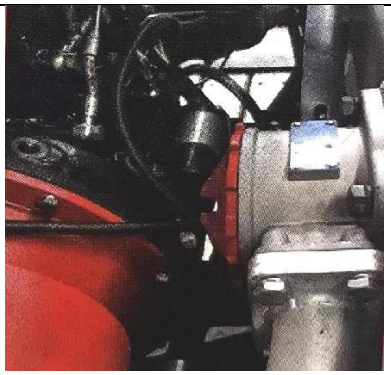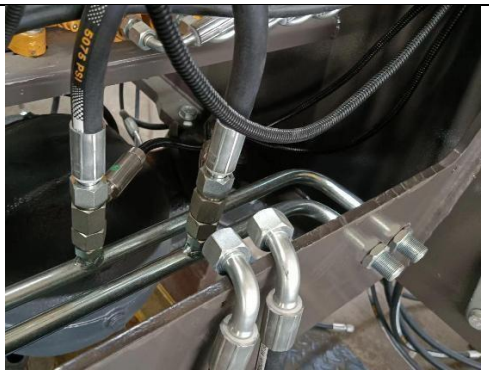Part II: Features

		
Man-sized radiator: Radiator adopts international advanced panel independent cooling system to ensure that the oil filter quality and temperature control.	Duplex gear pump:Duplex gear pump easy maintenance, high pressure, not easy to wear. It increases the oil inlet and outlet and ensures the required flow rate of the whole machine	Oilless bushing: The machine uses oilless bearing, wear resistance is 100 times that of a common case because of butter only once a year.
		
Reduction gears of tank It uses the BM5 large torque motor which is from domestic famous manufacture, a reasonable ratio maximizes efficiency.	Filter (Cleaner): It adopts self-sealing oil filter with High accuracy and convenient maintenance. Double pump filter the oil in and out to effectively protect the life of hydraulic parts.	Shanyi tubing: All tubing used international standard joint to make sure there is no oil leak, large flow, Easy to maintenance, universal.
Remark: Machine width 2.55m, without removing cab when loading into container,		

Part III: Optional configuration device

Optional Item	Picture
Automatic lubrication pump	
Electronic hydraulic weighing system (Aggregate Weighing Accuracy: ± 5-10%)	
High pressure mixer cleaning device	
Bucket vibrator	
Air conditioner	

Part III: More Photos







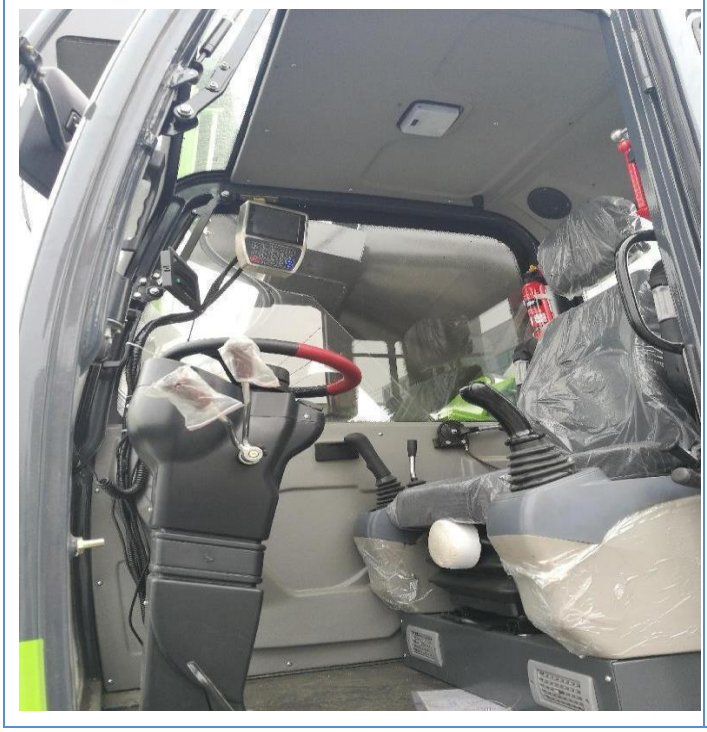














www.junowhn.com

EL SALVADOR: AVE, ESPAÑA BO, SAN MIGUELITO, N 1430, SAN SALVADOR, SAN SALVADOR . NIT 0614-290422-103-2 No. REGISTRO 314500 CEL (503)60436015 CORREO: JUNOW.SV@GMAIL.COM

GUATEMALA-9NA AVE. 1-25,ZONA 5 CHIMALTENANDO CEL (502)374623836 CORREO: VENTAS@JUNOWHN.COM

HONDURAS: RESIDENCIAL MONTELIMAR, BLOQUE 2, No. 99, QUIMISTAN SANTA BARBARA. CEL (504)87426561

JUNOW SA DE CV

JUNOW SA

JUNOW S DE RL

www.junowhn.com

EL SALVADOR: AVE, ESPAÑA BO, SAN MIGUELITO, N 1430, SAN SALVADOR, SAN SALVADOR . NIT 0614-290422-103-2 No. REGISTRO 314500 CEL (503)60436015 CORREO: JUNOW.SV@GMAIL.COM

GUATEMALA-9NA AVE. 1-25,ZONA 5 CHIMALTENANDO CEL (502)374623836 CORREO: VENTAS@JUNOWHN.COM

HONDURAS: RESIDENCIAL MONTELIMAR, BLOQUE 2, No. 99, QUIMISTAN SANTA BARBARA. CEL (504)87426561

JUNOW SA DE CV

JUNOW SA

JUNOW S DE RL